

Low Standby-Power Quasi-Resonant Primary-Side Converter

General Description

The PN8606 consists of a Low Standby-Power Quasi-Resonant (QR) Primary-Side controller and a avalanche-rugged smart power VDMOSFET(PN8606M 700V,PN8606H 800V), specifically designed for a high performance AC/DC charger or adaptor with minimal external components. PN8606 operates in primary-side sensing and regulation, so opto-coupler and TL431 could be eliminated. Because of internal HV Start-up circuit, the system with PN8366 can achieve less than 30mW standby power consumption (230VAC). In CV mode, multi-mode and quasi resonant technique is utilized to achieve high efficiency, avoid audible noise and make the system meeting Energy star class VI. Good load regulation is achieved by the built-in cable drop compensation. In CC mode, the current and output power setting can be adjusted externally by the sense resistor R_{cs} at CS pin. PN8606 offers complete protections including Cycle-by-Cycle current limiting protection (OCP), over voltage protection (OVP), over temperature protection (OTP) and CS open or short protection (CSO/SP) etc.


Applications

- Switch AC/DC Adaptor
- Battery Charger


Features

- Internal avalanche-rugged smart power VDMOSFET
- Internal HV Start-up Circuit, Standby power consumption < 30mW at 230VAC
- Multi-mode and Quasi-Resonant technique achieve high efficiency, meeting energy star class VI
- $\pm 5\%$ CC Regulation at Universal AC input
- Primary-side Sensing and Regulation without TL431 and Opto-coupler
- Programmable Cable Drop Compensation
- No-need Control Loop Compensation Capacitance
- Excellent Protection Coverage:
 - ◇ Over Temperature Protection (OTP)
 - ◇ VDD Under/Over Voltage Protection(UVLO&OVP)
 - ◇ Cycle-by-Cycle Current Limiting (OCP)
 - ◇ Cs Short/Open Protection (CS O/SP)

Output Features

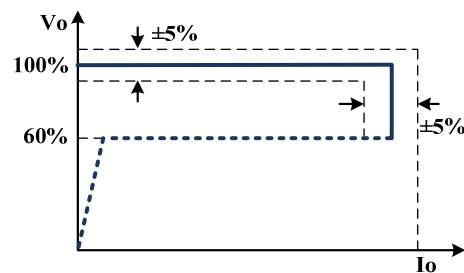

Package/Order Information



Order codes	Package	Typical power
		85~265 V _{AC}
PN8606MSSC-R1	SOP-7	6W
PN8606HSSC-R1	SOP-7	6W

Typical Application

